


Important Note

For Lead Sheath Cable the sealing range/cable details, as shown on the appropriate assembly instruction sheet change. Please refer to a Hawke catalogue or data sheet or visit our website at www.ehawke.com for details.

ICG 653/UNIV - Assembly Instruction Sheet AI 301


For Lead Sheath Cable used with the ICG 653 Universal Cable Gland please refer to Table 1 and Figure 1 for Cable Preparation Details.

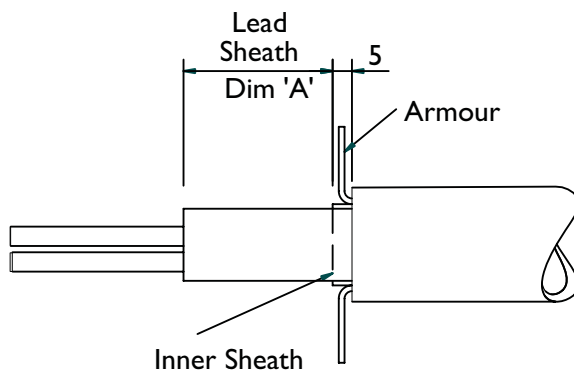

Cable Gland Size Ref.	Dimension A
O & Os	24 - 27 mm
A	24 - 27 mm
B	24 - 27 mm
C	24 - 27 mm
C2	24 - 27 mm
D	32 - 35 mm
E	32 - 35 mm
F	32 - 35 mm

ICG 653 Dedicated - Assembly Instruction Sheet AI 304

For Lead Sheath Cable used with the ICG 653 Dedicated Cable Gland please refer to Table 2 and Figure 2 for Cable Preparation Details.

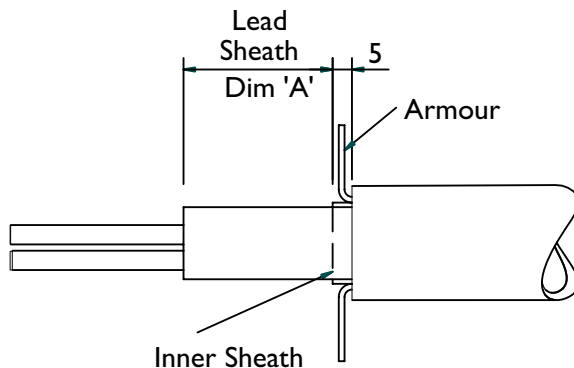


Cable Gland Size Ref.	Dimension A
O & Os	24 - 27 mm
A	24 - 27 mm
B	24 - 27 mm
C	31 - 25 mm
C2	31 - 25 mm
D	31 - 25 mm
E	37 - 40 mm
F	37 - 40 mm

501/453/RAC Sizes Os to J

For 501/453/RAC glands used with lead sheath cable, the sheath covering the lead shall be cut back to the 5mm max dimension shown above.

Safety First

Hawke International is a division of Hubbell Ltd.
Registered No. 669157 in England. Registered Office:
Mitre House, 160 Aldersgate Street, London EC1A 4DD.
 A member of the Hubbell Group of Companies

Hawke International
UK Office
Oxford Street West,
Ashton-Under-Lyne,
Lancashire
OL7 0NA. UK

AI 336 - Issue L / Page 1 of 2
Sales (UK): 0870 606 0105
Sales: +44 (0) 161 830 6698
Technical (UK): 0870 458 9358
Technical: +44 (0) 161 830 6697
Fax: +44 (0) 161 830 6648
E-mail: sales@ehawke.com

www.ehawke.com