


EZE-62

EZE-62 Increased Safety EExe

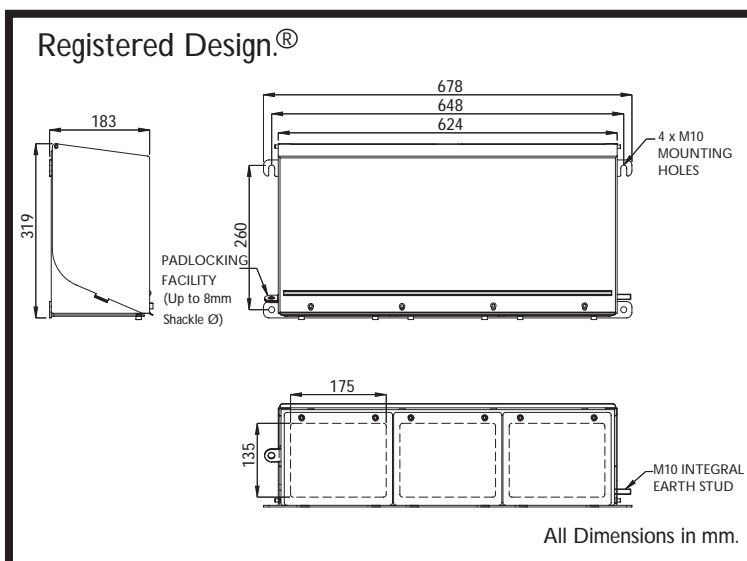

MAXIMUM QUANTITY OF ENTRIES

Thread Size	M16	M20/Os/O	M20/A	M25	M32	M40	M50
Bottom Face Quantity	60	60	42 (36*)	27 (24*)	18	12	6

* Recommended maximum for cable gland installation.

Technical Data

- Increased Safety EExe. Ⓢ II 2 GD EExe II. EZE-62 Baseefa Certificate No. Baseefa 04 ATEX 0171X.
- ZEZE-62 (Empty) Baseefa Certificate No. Baseefa 04 ATEX 0170U.
- Suitable for use in Zone 1, Zone 2, Zone 21 & Zone 22.
- Construction and test standards EN 50014, EN 50019 and EN 50281-1-1. IEC 60079-0 and IEC 60079-7.
- IP66 ingress protection to IEC 60529 and EN 60529.
- DTS01 deluge protection witnessed by EECS.
- Operating temperature range -40°C to +80°C. Temperature Class and Ambient T6 40°C. Optional T5 with ambients up to 65°C.

TERMINAL CAPACITY DATA

Terminal Type	Conductor Size (mm ²)		Max. Volts	Typical Terminal Arrangements							
	Min.	Max.		3 Vertical Rail (Max. Physical)		3 Vertical Rail (Max. Current)		4 Vertical Rail * (Max. Physical)		5 Vertical Rail * (Max. Physical)	
				Terminal Qty.	Amps	Terminal Qty. #	Amps	Terminal Qty.	Amps	Terminal Qty.	Amps
WDU 2.5N	0.5	2.5	420	114	7	12	21	152	6	190	5
WDU 2.5	0.5	2.5	550	114	7	13	21	152	6	190	5
WDU 4	0.5	4	750	96	9	11	28	128	8	160	7
WDU 6	0.5	6	550	72	13	10	36	96	12	120	10
WDU 10	1.5	10	550	57	20	9	50	76	17	95	15
WDU 16	1.5	16	750	48	27	8	66	64	23	80	21
WDU 35	2.5	35	750	36	47	6	109	48	40	60	36

Information in the table above is based on the maximum conductor size permitted for the terminal.

* Special / modified rail support arrangement.

At maximum current terminal quantity could fit on one rail standard arrangement, would distribute quantity across 3 rails.

Notes:

1. A combination of different sized entries is possible, please contact Hawke for more information.
2. The table above gives an indication of potential terminal arrangements. Please contact Hawke for information on other arrangements or empty enclosures.
3. A combination of different sized terminals is possible, please contact Hawke for more information.
4. Other terminal types are available.