


VIEW ON CABLE ENTRY SIDE OF BALLAST HOUSING  
SHOWING LOOP-IN-LOOP OUT FACILITY

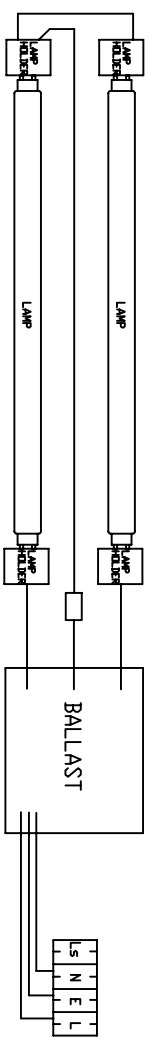

CATALOGUE REF.	DESCRIPTION	WATTAGE	LAMP	VOLTAGE	FREQUENCY
TRIE/218/BI	TRIDENT VL125	2 x 18W	BI PIN	220 - 254V	50-60Hz
TRIE/236/BI		2 x 36W			
TRIE/258/BI		2 x 58W			
TRIE/218/BI/120		2 x 18W			
TRIE/236/BI/120		2 x 36W		110 - 130V	

DRAWN	Slee
CHECKED	Slee
APPROVED	Slee
DATE	30.08.06

REF. DRES:-

**NOTES:**

- PRODUCT PROTECTION: EEx em II T4
- CERTIFICATE No: SIRAO3ATEX3206
- CODING: Ex II 2GD EEx em IIC T4 -45C to +55C(18 & 38W VERSIONS)  
Ex II 2GD EEx em IIC T4 -45C TO +50C (58W VERSION)
- TERMINALS : UP TO 6MM SQ.
- CABLE ENTRIES : TWO X M20 ENTRIES
- INGRESS PROTECTION : IP66/67
- ENCLOSURE : POLYCARBONATE Moulding
- LAMP ENVELOPE : POLYCARBONATE
- REFLECTOR : MARINE GRADE STAINLESS STEEL,PRE TREATED WITH RRCt AND EPOXY POWDER COATED
- GASKET: SILICONE
- EXTERNAL FASTNERS: STAINLESS STEEL
- WEIGHT:
- VARIANT: 2X18W 2X36W 2X58W
- LOOP-IN-LOOP OUT: 3.8KG 5.4KG 6.2KG
- THROUGH WIRED : 4.4KG 6.0KG 6.8KG
- POLE MOUNT : 4.1KG 5.7KG 6.5KG

WITHOUT OUR PERMISSION THIS DRAWING, WHICH IS OUR COPYRIGHT, MAY NOT BE REPRODUCED OR MADE AVAILABLE TO THIRD PARTIES.  
AUTHORISATION IS GIVEN TO ..... TO REPRODUCE THIS DRAWING FOR INTERNAL PURPOSES ONLY.

Doc No	MOD BY	MATERIAL	TOLERANCE	SCALE	DATE
		CHANGE	+/-2.00		
		Polycarbonate			
		Finish	SURFACE ROUGHNESS		
		Finish			
		DIMS. IN	MM		

**Victor Lighting**

Victor Lighting  
388 Hillington Road,  
Glasgow G52 4BL  
Scotland  
Tel:0141 810 9644 Fax:0141 810 9642

VL125 Trident  
GA DRAWING

DRAWING NUMBER/SHEET NUMBER  
F2218 1 OF 1