


REMOVE ALL BURRS & SHARP EDGES





IF IN DOUBT ASK!

3RD ANGLE PROJECTION



LAMP TYPE	T6	DUST
	AMBIENT TEMPERATURE	TEMPERATURE
1 x 8W T5	-20°C TO +55°C	
2 x 8W T5	-20°C TO +55°C	T85°C

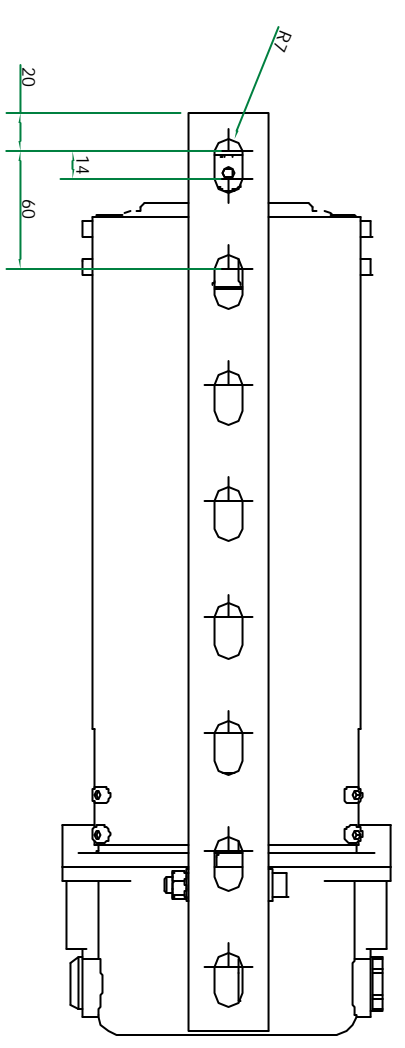

2 x M20 CABLE ENTRIES
1 EACH SIDE AS STANDARD
OPTIONS OF M25 OR 3/4" NPT.

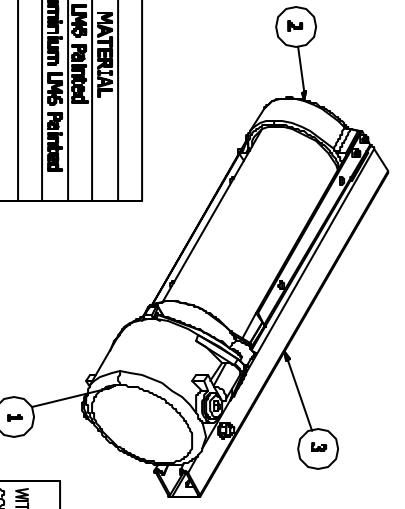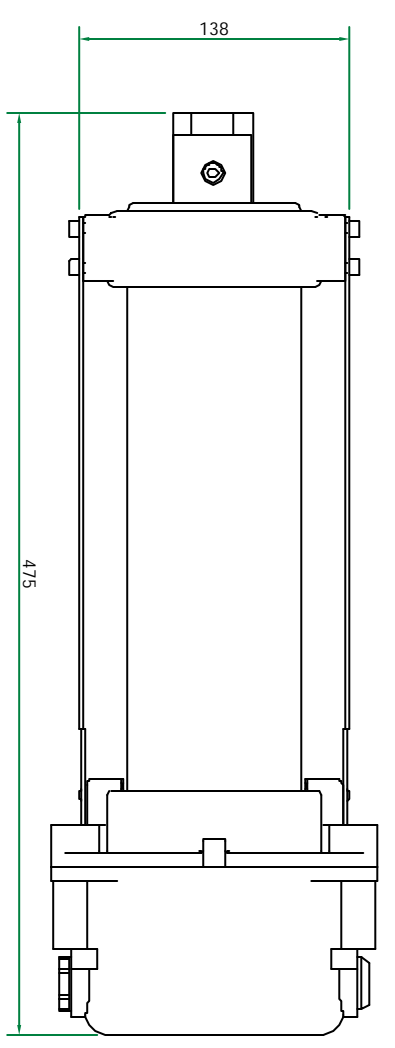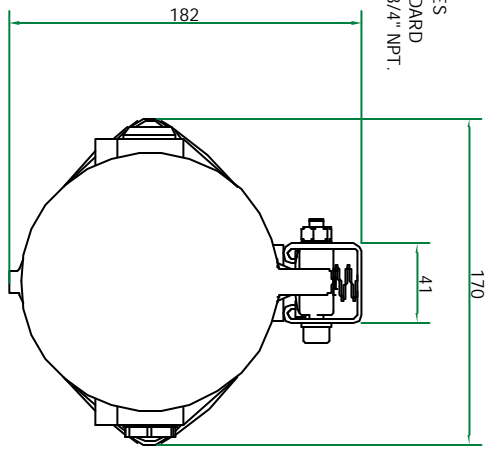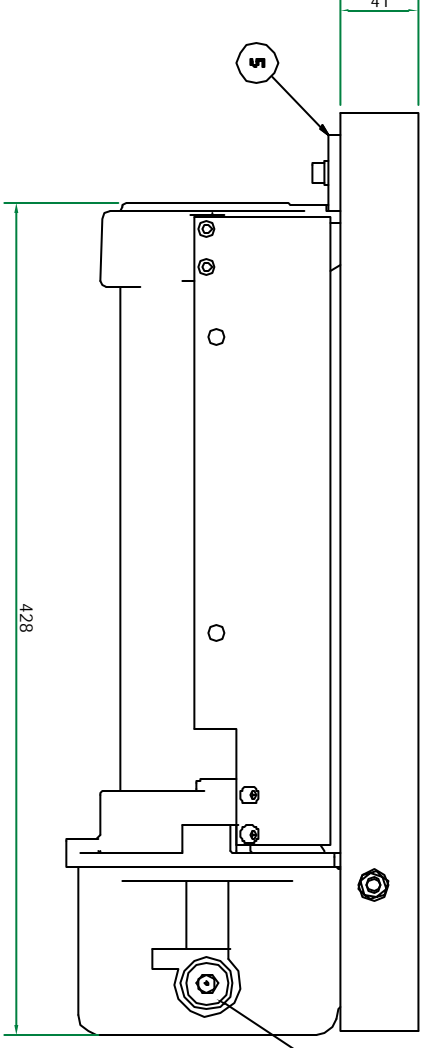

NOTES
PRODUCT PROTECTION :- EEx d IIC
CERTIFICATE No. SIRADATEX1021X
CODING :- Ex II 2 G D EEx d IIC T6
TERMINALS :- UP TO 6mm SQ CONDUCTOR
CABLE ENTRIES :- TWO x M20 ENTRIES
BODY MATERIAL :- ALUMINIUM LM6 PAINTED SMOKE GREY
INGRESS PROTECTION :- IP66/67
GLASS & COVER :- TOUGHENED GLASS TUBE WITH
ALUMINIUM LM6 GRADE PAINTED SMOKE GREY COVER
VOLTAGE & FREQUENCY :- 220-240V a.c./d.c 50/60Hz

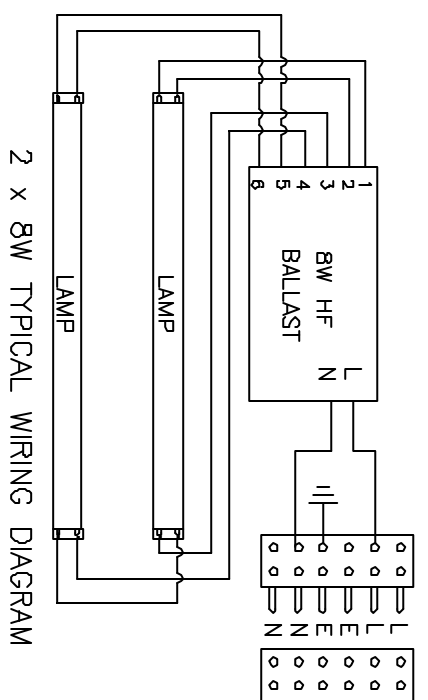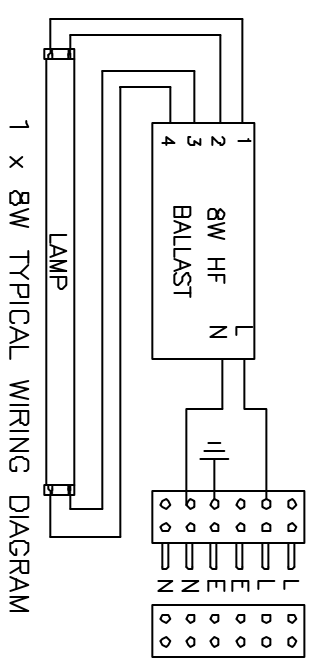

ITEM	QTY	TITLE	Part No.	DRAWING NO.	PART CODE	MATERIAL
1	1	VL51A BW End Caping	C191818	V191818	ALUMINIUM LM6 PAINTED	
2	1	VL51A 1FT Glass Tube Assembly	C091735	V091735A	GLASS & ALUMINIUM LM6 PAINTED	
3	1	VL51A Chained Bar 1FT	S191766A	V191766A	STEEL, MILD	
4	2	Viscount M6 Spring Nut	A7452	V191787	STEEL	
5	2	Viscount Unistrut Square Washer	101788	V191788	STEEL	
14	1	M20 Eye Banding Plug	A7785		Brown Zinc Plated	
15	1	M20 Temporary plug			Plastic	

CHANGE	DCP NO	MOD BY	DATE

WITHOUT OUR PERMISSION THIS DRAWING, WHICH IS OUR
COPYRIGHT, MAY NOT BE REPRODUCED OR MADE AVAILABLE
TO THIRD PARTIES.
AUTHORISATION IS GIVEN TO
TO REPRODUCE THIS DRAWING FOR INTERNAL PURPOSES ONLY.

FINISH
Pointed Smoke Grey

TOLERANCE
SURFACE ROUGHNESS

SCALE -

Victor Lighting

Victor Lighting
PO Box 5571,
Glasgow G52 9AH
Scotland
Tel:0141 810 9644 Fax:0141 810 9642

VL51A Viscount 8W
GENERAL ARRANGEMENT